

MANIFOLD 210 double cavity

Combiners allow several radio channels to operate at one site using a common antenna. The MCP 210 V manifold combiner uses an alternative method for combining up to 4 channels in the VHF range. The number of channels can be increased or decreased upon request. A double band pass filter with adjustable window coupling is used for each channel. Each channel is allocated in a single 5 unit 19" cabinet.


Electrical Specifications

Frequency band:	118 - 144 MHz
Impedance:	50 Ω
Input Power:	200W CW
Insertion loss:	Adjustable 1.5 ÷ 4 dB

Mechanical Specifications

Connector Type:	N Female
Dimensions:	19" rack, 5HU, depth 670 mm
Operating temp.:	-10°C to +55°C
Tuning method:	Rotary knob, telescopic movement

Combiners	Channels	Cabinet 5HU	Total height HU	Attenuation dB ± 500 kHz at 127.5 MHz
MCP210-V/2-2 F06VS210M2MDxxxx	2	2	10	≥ 32
MCP210-V/3-3 F06VS210M3MDxxxx	3	3	15	≥ 32
MCP210-V/4-4 F06VS210M4MDxxxx	4	4	20	≥ 32

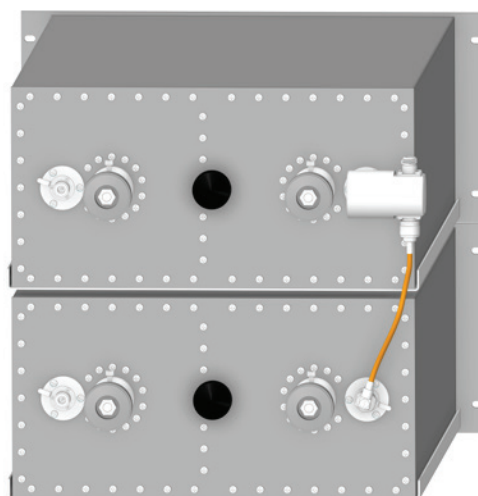

MCP210-V/2-2